

**Morsø 6600 series** - when Morsø created the 6600 series they wanted something more than just a functional heating appliance, they wanted a challenging interpretation of style and function and to set new standards that captivates the viewer with a surprising elegance. The convective stoves artistic expression sets it apart from the crowd. Its combination of cast-iron, glass and its elliptical shape is complimented by a unique double door maximising the glass area, and providing a 180-degree view of the flames. This is then further enhanced by gold tinted vermiculite bricks decorated with the Morsø squirrel, proving that this is a genuine Morsø product. Behind the glass Morsø has an improved air supply, better insulation chamber and have developed a combustion technology that uses pre-heated air to ensure a higher temperature in the firebox, so that almost all the flues gases are burnt, which results in both more environmentally friendly combustion and better fuel economy. The Morsø 6600 series is made from 99% recycled cast iron and its appeal not only lies in its ability to absorb heat from the fire and release it slowly into your home after the fire has gone out, but also in the aesthetically pleasing form it has been shaped into. Morsø craftsmen produce the finest cast iron wood stoves in the world, and the name Morsø has been synonymous with quality since April 1853.



## 6643 CLEARANCES

Clearances based on installation of a Triple Skin Flue Kit w/ Perforated Mesh Flue Shield on a non-combustible wall (AS2918)

Rear Clearance without Heat Shield.....	275mm
Rear Clearance with Heat Shield.....	N/A
Side Clearance.....	650mm
Corner Clearance.....	300mm

### Hearth Requirements

Front Clearance.....	300mm
Side Clearance.....	180mm
Hearth Thickness.....	6mm

Clearance above the Fire..... 1.5m†

## 6643 SERIES SPECIFICATIONS

Height.....	1016mm
Width.....	500mm
Depth.....	380mm


### Internal Firebox

Height.....	332mm-360mm
Width.....	412mm
Depth.....	236mm

Avg. Area Heated.....	100-120m <sup>2</sup>
Efficiency.....	64.0%
Emissions.....	1.5g/kg
Heat Transfer.....	Radiant
Baffle.....	Vermiculite Upper, Lower
Firebricks.....	Vermiculite Back
Glass Dimensions.....	292mm x 366mm
Log Size.....	360mm
Door Rope.....	8mm

### Measurement of Stove

Flue Collar Size.....	6" (152mm)
Flue Location.....	Top, Rear Option
Top Flue Centre to Back.....	190mm
Rear Flue Centre to Floor.....	840mm

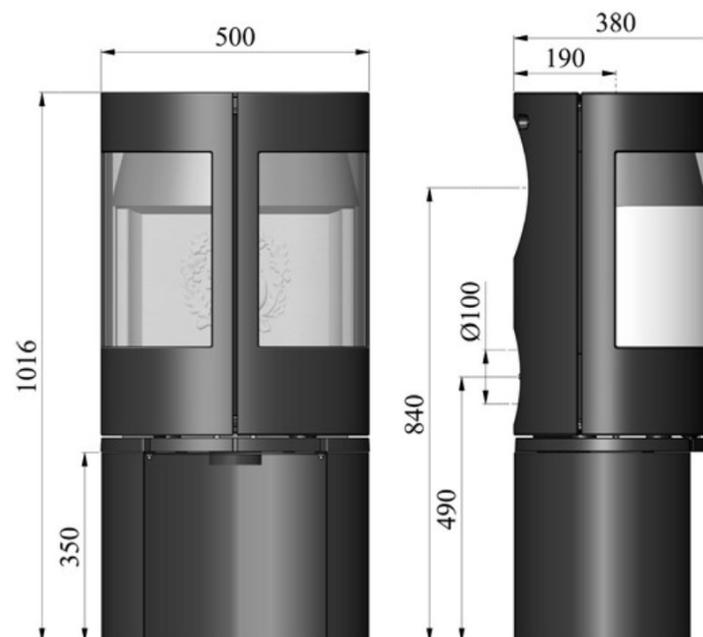

The above information is to assist you in your choice of a suitable fire. It is not intended to be all the information required to install the fire and does not replace the installation manual which provides more detailed information. In the interest of product development Morsø reserves the right to change specifications without prior notice. † minimum clearance: before installing any combustible product above or near the fireplace we recommend that you confirm with the products manufacture for minimum distances required for that particular product.

## MORSØ 6600 SERIES - FEATURES AND BENEFITS

- More than 150 years of cast iron experience means top quality castings that sets the industry standard
- Double Doors enhanced by gold tinted vermiculite fire bricks decorated with the Squirrel Motif
- Reversible flue collar for either top or rear venting providing installation flexibility
- Superior air wash system keeps the glass clean for unparalleled fire viewing
- Tertiary Air system that draws air up the back of the stove and then injects it to the upper chamber to burn off excess gases
- Single air control for ease of operation
- Discreet 'hidden' door handles blend in with the design of the stove
- Rugged ash pan made of heavy gauge steel
- 10 years limited warranty

**morsø®**

integrated design since 1853